

FIG. 1

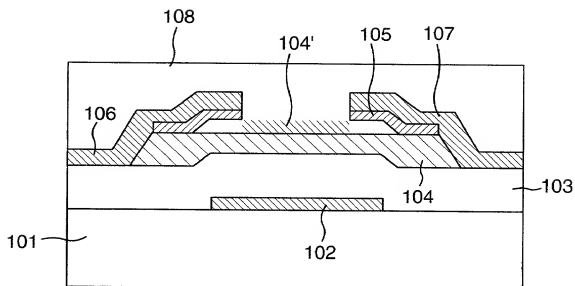


FIG. 2



CURRENT VALUE RATIO BETWEEN SOURCE AND  
DRAIN IN THE CASE OF BACK GATE ELECTRODE  
VOLTAGE OF 40V AND IN THE CASE OF PROVIDING  
NO BACK GATE ELECTRODE

FIG. 3

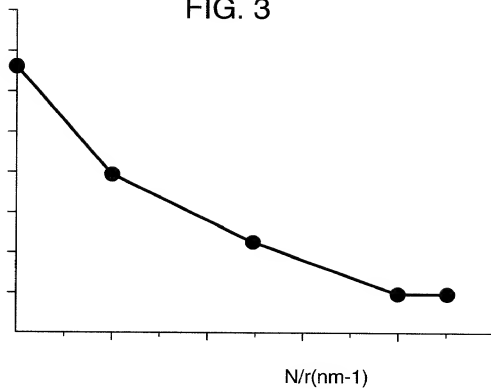


FIG. 6

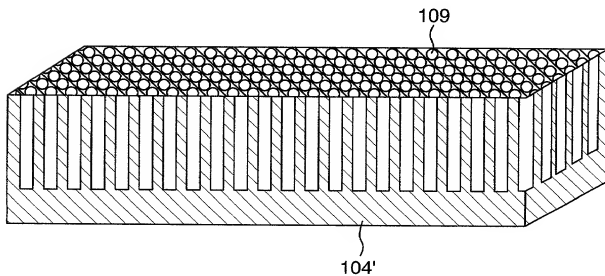


FIG. 4

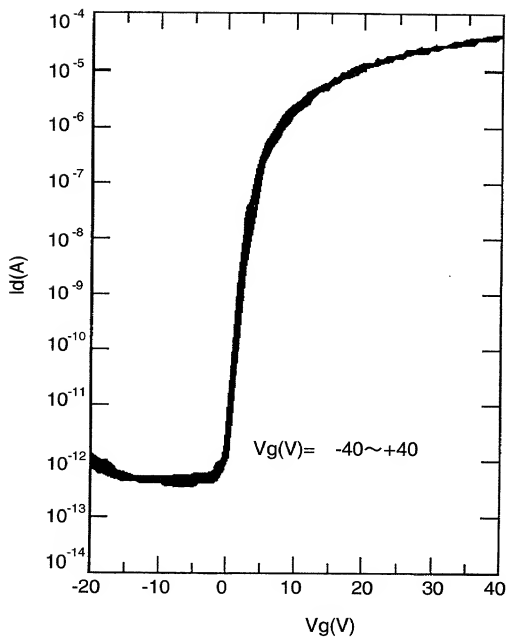


FIG. 5

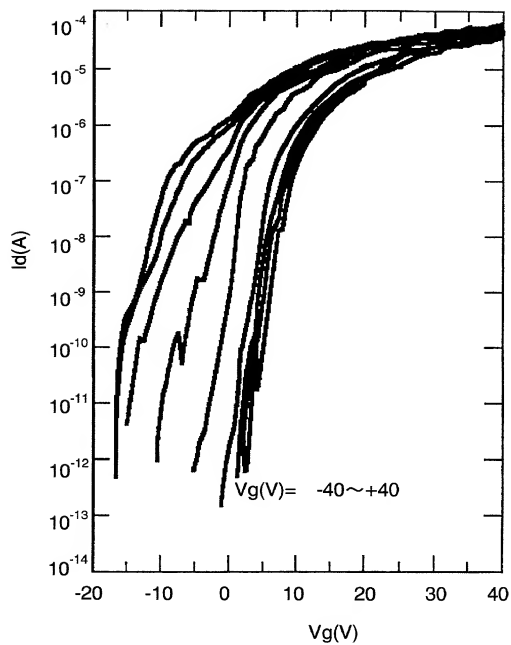


FIG. 7

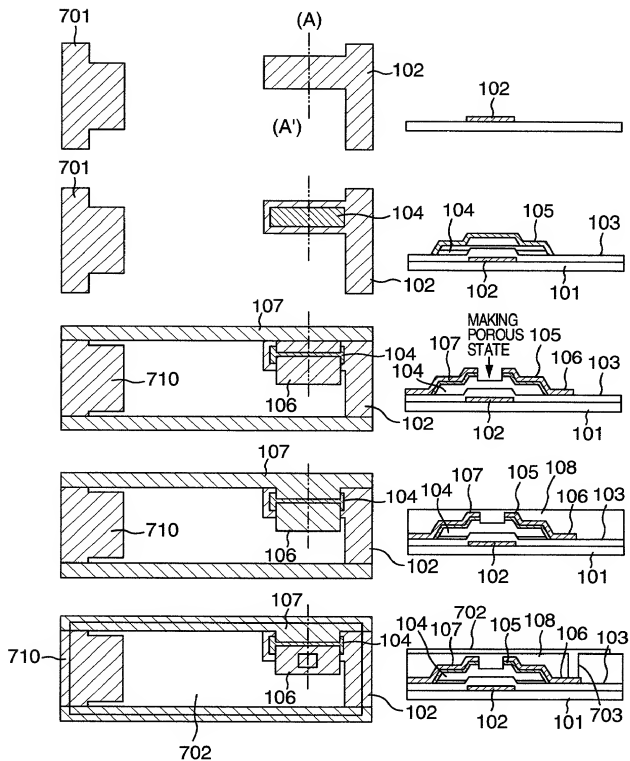


FIG. 8

